




TECHNICAL SPECIFICATION DATA SHEET

Framework Grounding Kits for corrugated cable

TSX-01F

Page: 1/1

1. DRAWING

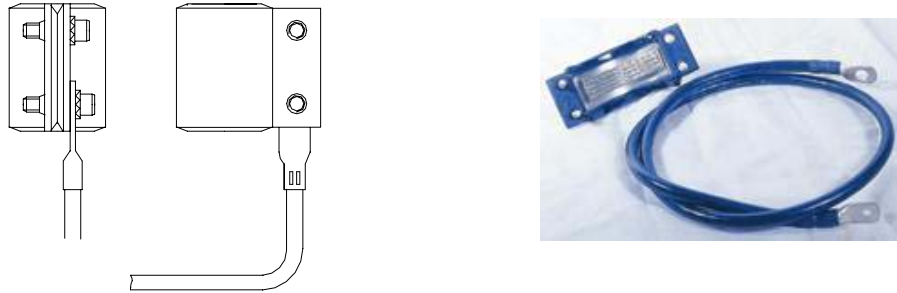

2. ELECTRICAL CHARACTERISTICS

Grounding Kit (Framework Type) able to bear or endure concussion electric current level reaching 70KA, and able to bear or endure work frequency high-handed level up to 30KV.

3. MECHANICAL CHARACTERISTICS

Bend Point σ_s , N/mm ²	Resist Pull Intensity σ_b N/mm ²	Elongation δ_5 , %
≥ 205	≥ 520	≥ 40

Waterproofing index : IP68

4. TYPE

Number	Type	Weight (g/p)
C0275F	1/4XF (ϕ 6.85*600)	200
C0270F	3/8XF (ϕ 10.1*600)	240
C0271F	1/2F (ϕ 16*600)	250
C0272F	7/8F (ϕ 27*600)	280
C0273F	1-1/4F (ϕ 39.5*600)	300
C0274F	1-5/8F (ϕ 50*600)	320

Prepared : LSW

Checked : LSC

Edition : B3- 04/06/2008

DIVISION TELECOMMUNICATION - 52, rue du Montparnasse - 75014 PARIS

France Tel : +(33) 1 42 79 14 00 - Fax (33) 1 42 79 15 00

DTLC@acome.fr - Website : www.acome.fr