

P65-17-XL-2

Very Low Broadband Antennas


POLARIZATION: Dual linear $\pm 45^\circ$
 FREQUENCY (MHz): 698-894
 HORIZONTAL BEAM WIDTH ($^\circ$): 65
 GAIN (dBi/dBd): 17.5/15.4
 TILT: 2°
 LENGTH: 2.4m (96")

ELECTRICAL SPECIFICATIONS*

	698-894	
	698-806	806-894
Frequency range (MHz)	698-894	
Frequency band (MHz)	698-806	806-894
Gain (dBi/dBd)	16.5/14.4	17.5/15.4
Polarization	Dual Linear +/- 45	Dual Linear +/- 45
Nominal Impedance (Ω)	50	50
VSWR	< 1.33:1	< 1.33:1
Horizontal beam width, -3 dB ($^\circ$)	68	65
Vertical beam width, -3 dB ($^\circ$)	8.5	7.5
Electrical down tilt ($^\circ$)	2	2
Side lobe suppression, vertical 1st upper (dB)	> 15	> 15
Isolation between inputs (dB)	> 30	> 30
Tracking, horizontal plane $\pm 60^\circ$ (dB)	< 2	< 2
Vertical beam squint ($^\circ$)	< 0.5	< 0.5
Front to back ratio (dB) $180^\circ \pm 30^\circ$ copolar	> 30	> 30
Front to back ratio (dB) $180^\circ \pm 30^\circ$ total power	> 25	> 25
Cross polar discrimination (XPD) 0° (dB)	> 15	> 15
Cross polar discrimination (XPD) $\pm 60^\circ$ (dB)	> 10	> 10
IM3, 2xTx@43dBm (dBc)	-153	
Power handling, average per input (W)	400	
Power handling, average total (W)	800	

MECHANICAL SPECIFICATIONS*

Connector	2 X 7/16 DIN Female
Connector position	Bottom
Dimensions, HxWxD, in (mm)	96" x 12" x 5" (2438 x 305 x 125)
Mounting	Pre-mounted Tilt Brackets
Weight, with brackets, lbs (kg)	54 (25)
Weight, without brackets, lbs (kg)	43 (20)
Wind load, frontal/lateral/rear side 42 m/s Cd=1.0 (N)	880
Maximum operational wind speed, mph (m/s)	100 (45)
Survival wind speed, mph (m/s)	125 (55)
Lightning protection	DC Ground
Operating Temperature	
Radome material	PVC
Packet size, HxWxD, in (mm)	107" x 16" x 10" (2725 x 400 x 255)
Radome colour	Light Grey
Shipping weight, lbs (kg)	65 (30)
RET	N/A
Brackets	7256.00, 7454.00, 2210.00

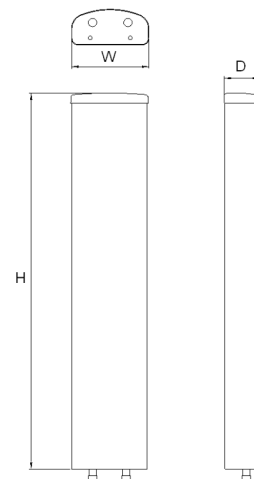

*All specifications subject to change without notice. Please contact your Powerwave representative for complete performance data.

ANTENNA PATTERNS*

For detailed patterns visit <http://www.powerwave.com/rpa/>.