

P65-15-XL-R

Very Low Broadband Antennas


POLARIZATION: Dual linear $\pm 45^\circ$
 FREQUENCY (MHz): 698-894
 HORIZONTAL BEAM WIDTH ($^\circ$): 65
 GAIN (dBi/dBd): 14.7/12.6
 TILT: 0-13
 LENGTH: 51" (1295mm)

ELECTRICAL SPECIFICATIONS*

Frequency range (MHz)	698-894	
	698-806	806-894
Frequency band (MHz)	698-806	806-894
Gain (dBi/dBd)	14.0/11.9	14.7/12.6
Polarization	Dual Linear +/- 45	Dual Linear +/- 45
Nominal Impedance (Ω)	50	50
VSWR	< 1.5:1	< 1.5:1
Horizontal beam width, -3 dB ($^\circ$)	70	63
Vertical beam width, -3 dB ($^\circ$)	17.5	15.5
Side lobe suppression, vertical 1st upper (dB)	> 16	> 16
Isolation between inputs (dB)	> 30	> 30
Tracking, horizontal plane $\pm 60^\circ$ (dB)	< 2	< 2
Electrical Downtilt Range	0 - 13	0 - 13
Vertical beam squint ($^\circ$)	< 0.5	< 0.5
Front to back ratio (dB) $180^\circ \pm 30^\circ$ copolar	> 25	> 25
Front to back ratio (dB) $180^\circ \pm 30^\circ$ total power	> 22	> 22
Cross polar discrimination (XPD) 0° (dB)	> 15	> 15
Cross polar discrimination (XPD) $\pm 60^\circ$ (dB)	> 10	> 8
IM3, 2xTx@43dBm (dBc)	-153	-153
Power handling, average per input (W)	500	500
Power handling, average total (W)	1000	1000

MECHANICAL SPECIFICATIONS*

Connector	2 X 7/16 DIN Female
Connector position	Bottom
Dimensions, HxWxD, in (mm)	51" x 12" x 6" (1295 x 305 x 152)
Mounting	Pre-mounted tilt brackets
Weight, with brackets, lbs (kg)	36 (16)
Weight, without brackets, lbs (kg)	25 (11)
Wind load, frontal/lateral/rear side 42 m/s Cd=1.0 (N)	920
Maximum operational wind speed, mph (m/s)	100 (45)
Survival wind speed, mph (m/s)	150 (67)
Lightning protection	DC Ground
Operating Temperature	
Radome material	PVC
Packet size, HxWxD, in (mm)	58" x 16" x 10" (1475 x 400 x 255)
Radome colour	Light Grey
Shipping weight, lbs (kg)	44 (20)
RET	iRET AISGv1.1, MET and AISGv2.0 Available
Brackets	7256.00, 7454.00, 2210.00

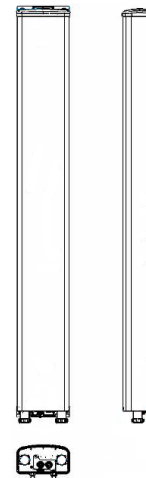

*All specifications subject to change without notice. Please contact your Powerwave representative for complete performance data.

ANTENNA PATTERNS*

For detailed patterns visit <http://www.powerwave.com/rpa/>.